



Glad Tidings
Holy Land Designs,™ Inc.
www.holylanddesigns.net


Stable Assembly Instructions



Glad Tidings
Holy Land Designs,™ Inc.
www.holylanddesigns.net



PO Box 516
Clay, AL 35048
Tel: 1-888-692-0171
Fax: 1-205-655-1096

Parts List

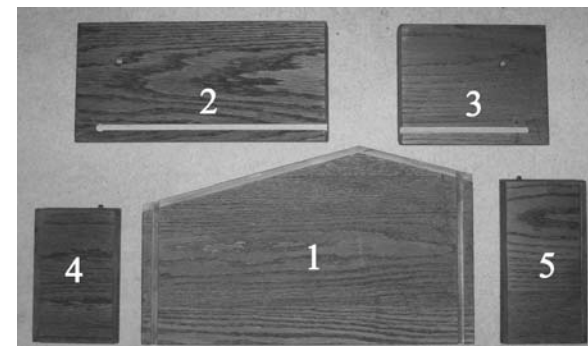

- | | |
|--------------------|---------------|
| 1. Back | 4. Left Side |
| 2. Left Side Roof | 5. Right Side |
| 3. Right Side Roof | |



Step 1: Place left side roof (2) on level surface with groove facing up. Slide long side of back (1) into groove on roof.

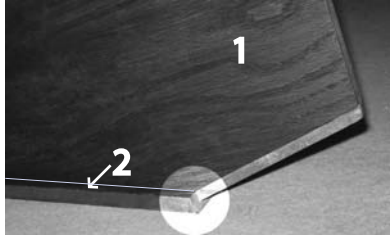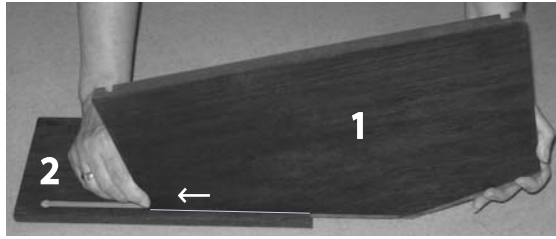

Stop sliding the back when the back triangle point lines up with the edge of the roof.


Important Note: If a piece does not slide easily during insertion, DO NOT FORCE IT! Forcing pieces may cause the grooved piece to break. Instead, check the alignment of the leading edge of the tongue in the groove. Once aligned correctly, the tongue should slide easily in the groove.

Step 2: Slide right side roof (3) onto short side of back (1) until it touches the left side roof piece (2).

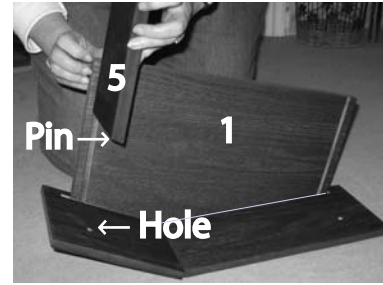
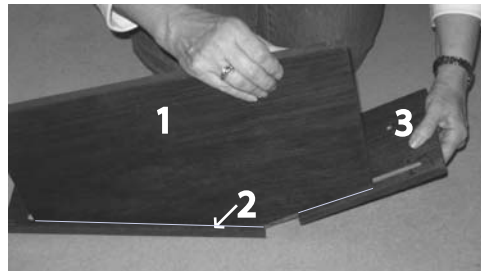


Step 3: Slide right side (5) into groove on back (1). When fully inserted, make sure the pin goes into the hole on the roof.

Step 4: Slide left side (4) into groove on back. (1) When fully inserted, make sure the pin goes into the hole on the roof.

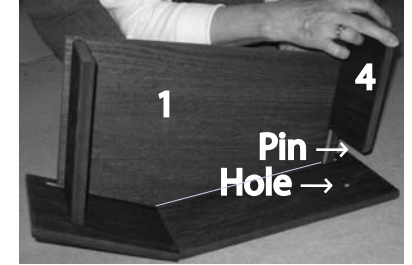

Step 5: Turn stable right side up and check the alignment of the two roof pieces. Make sure that the joint between them is exactly above the top of the triangle on the back piece (Fig. A). Small adjustments may also be made by gently pushing / pulling the two sides in / out (Fig. B).

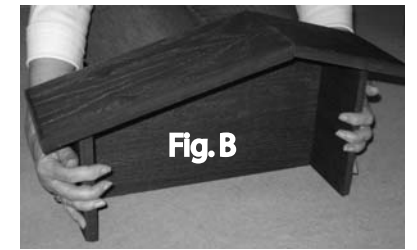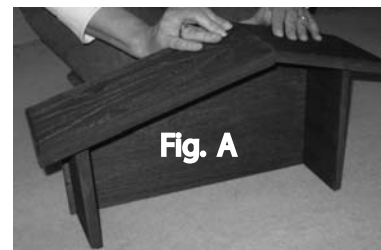

Disassembly: Simply reverse the above instructions, taking special care not to force the removal of any piece. If a piece does not slide out easily, check the alignment of the tongue in the groove before continuing.